




Drum Magnetic Separators PBM

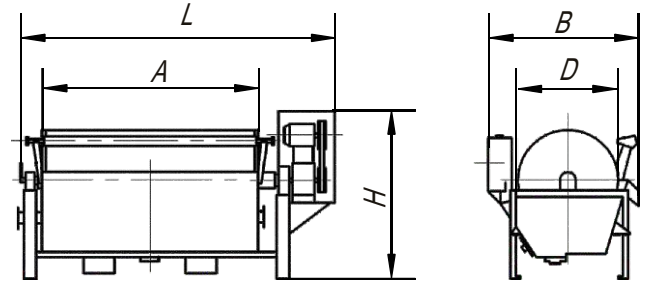

Designed for wet enrichment of ore and materials, regeneration of heavy environment with the help of magnetite weighting material.

Installed at the concentrating mills and enterprises of ferrous metallurgy.

Name	Maximum productivity, m ³ /h	Feed size, mm	Dimensions, mm					Drive power, kW	Weight, t
			D	A	L	B	H		
PBM-90/250-N	200	0-6	900	2500	3000	2100	2220	5,5	4
PBM-P-90/250-N		0-3							
PBM-PP-90/250-N		0-1							
PBM-P-120/300-N	300	0-3	1200	3000	4000	2700	2600	7,5	7
PBM-PP-120/300-N		0-1							
PBM-P-150/200-N	350	0-3	1500	2000	3000	2000	2100	5,5	6
PBM-PP-120/200-N		0-1							
PBM-P-80/170-N	250	0-1	800	1700	3100	2000	2100	5,5	4,3
PBM-P-90/250-N	310	0-1	900	2500	3800	2200	2300		5,7

1. Magnetic induction on drum surface is 0.17 - 0.3 T, at the distance of 50 mm from the surface - not less than 0.065 T.

2. Manufacturing of separators accounting for customer's requirements is available.

