




## Plate Magnetic Separators PK

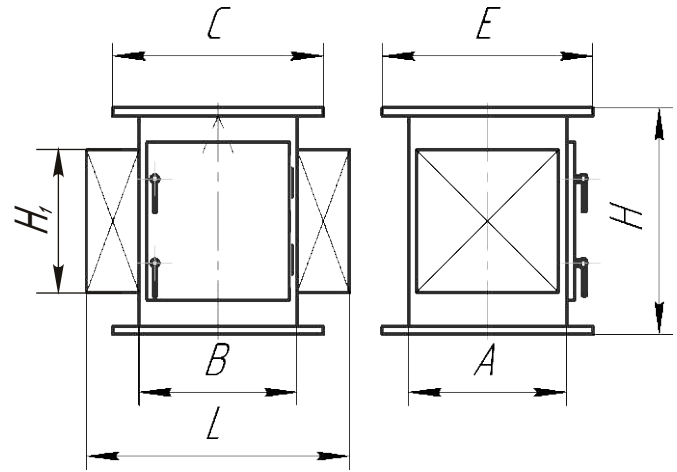

Designed for refinement of dry materials from ferro magnetic impurities.

Installed on vertical product pipelines and in the places there product is dropped of.

Name	Productivity,* t/h	Dimensions, mm							Weight, kg
		L	B	A	C	E	H	H <sub>1</sub>	
PK-20/20	5			200		280			120
PK-30/20	10	380	200	300	280	380	600	360	160
PK-50/20	15			450		530			280
PK-40/25	20			400		480			280
PK-50/25	25	520	250	500	330	580	620	380	425
PK-60/25	30			600		680			570
PK-30/30	35			300		380			330
PK-48/30	40			480		560			450
PK-70/30	45	600	300	700	380	780	640	440	850
PK-82/30	50			820		900			1000

- \* For the product with the bulk weight of 0.6 t/m<sup>3</sup>.
- Magnetic induction on magnetic blocks' surface is according to technical specification.
- Manual separator clean-up.
- Manufacturing of separators accounting for customer's requirements is available.

