




Plate Magnetic Separators PK

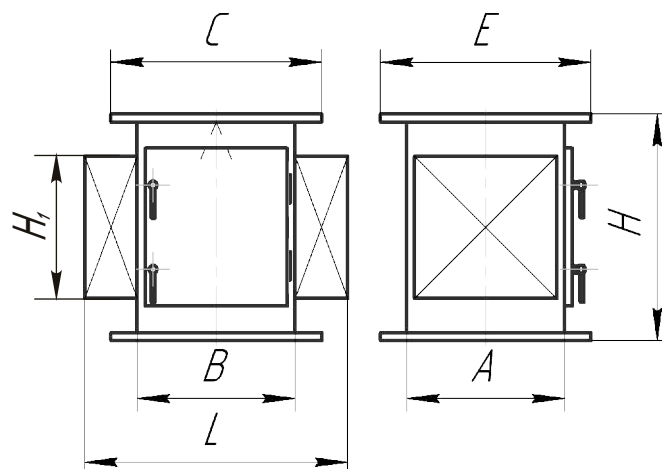

Designed for refinement of dry materials from ferro magnetic impurities.

Installed on vertical product pipelines and in the places there product is dropped of.

Name	Productivity,* t/h	Dimensions, mm							Weight, kg
		L	B	A	C	E	H	H ₁	
PK-20/20	5	380	200	200	280	280	600	360	120
PK-30/20	10			300		380			160
PK-50/20	15			450		530			280
PK-40/25	20	520	250	400	330	480	620	380	280
PK-50/25	25			500		580			425
PK-60/25	30			600		680			570
PK-30/30	35	600	300	300	380	380	640	440	330
PK-48/30	40			480		560			450
PK-70/30	45			700		780			850
PK-82/30	50			820		900			1000

1. * For the product with the bulk weight of 0.6 t/m³.
2. Magnetic induction on magnetic blocks' surface is according to technical specification.
3. Manual separator clean-up.
4. Manufacturing of separators accounting for customer's requirements is available.

CONTACTS:

33024, Rivne, Ukraine, Mlynivska str. 32
tel. +38 067 363 82 16, +38 050 461 49 39,
+38 050 460 08 99
e-mail: separator@prodecolog.com.ua
www.prodecolog.com.ua

