




Plate Magnetic Separators PPS

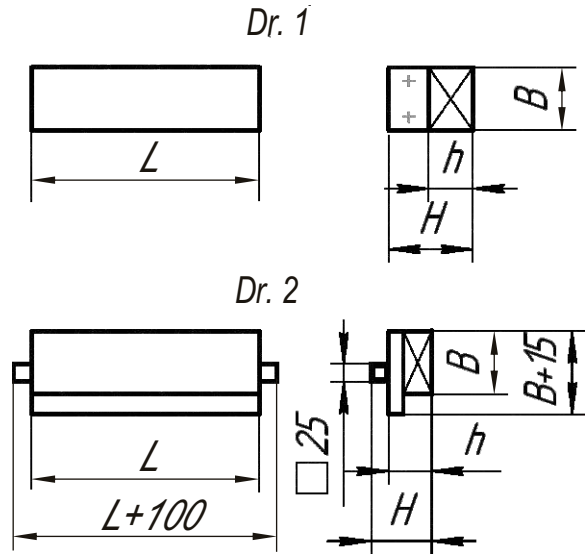

Designed for refinement of dry materials from ferro magnetic impurities.

Applied at the enterprises of confectionery, breadmaking, and other industries.

| Name | Dr. | Dimensions, mm | | | | Weight, kg |
|-------------|-----|----------------|----|----|------|------------|
| | | L | B | h | H | |
| PPS - 6/40 | 1 | 400 | 64 | 33 | 62 | 5 |
| PPS - 8/40 | | | 85 | | | 7 |
| PPS - 8/80 | | 800 | | | 14 | |
| PPS - 4/100 | | 1000 | | | 12 | |
| PPS - 4/125 | | 1250 | 44 | 34 | 64 | 15 |
| PPS - 4/150 | | 1500 | | | 18 | |
| PPS - 8/100 | 2 | 100 | | | | 11 |
| PPS - 8/125 | | 1250 | 85 | 20 | 45 | 13,8 |
| PPS - 8/150 | | 1500 | | | 16,5 | |

1. Maximum induction on the operating surface is not less than 120 mT.
2. Manufacturing of separators accounting for customer's requirements is available.

