




Plate Piped Magnetic Separators PTSH

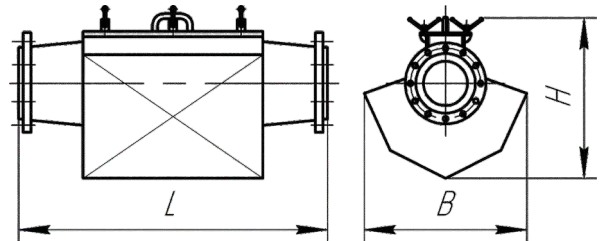

Designed for extracting ferro magnetic impurities from dry materials that are moved by pneumatic transport.

Installed on horizontal pipelines of material supply.

Applied in cement, chemical, and others industries.

Name	Arbitrary pipeline diameter D_y , mm	Pipeline pressure, MPa, not more	Temperature of material, °C, not more	Dimensions, mm			Weight, kg
				L	B	H	
PTSH-100	100	0.5	180	820	400	390	200
PTSH-150	150			950	600	580	300
PTSH-200	200				660	610	400
PTSH-250	250				750	630	520
PTSH-300	300				800	700	650

1. Magnetic induction on magnet blocks' surface is according to technical specification.
2. Manual separator clean-up, with an intermittence of material supply.
3. Manufacturing of separators accounting for customer's requirements is available.

CONTACTS:

33024, Rivne, Ukraine, Mlynivska str. 32
tel. +38 067 363 82 16, +38 050 461 49 39,
+38 050 460 08 99
e-mail: separator@prodecolog.com.ua
www.prodecolog.com.ua

