



SCIENTIFIC AND MANUFACTURING FIRM

PRODECOLOGIA


We know better what customer needs!

28
YEARS

of the experience
and
the innovations



Rod Magnetic Separators SB

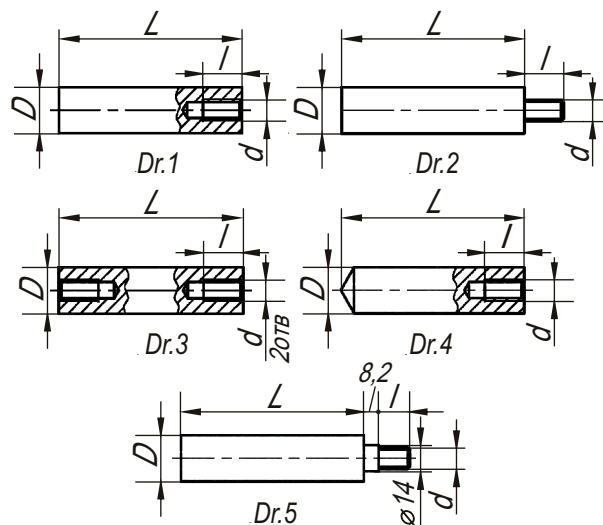

Designed for refinement of liquid and dry materials from ferro magnetic impurities.

Applied independently or as blocks of magnetic separators.

Name	Dr.	Dimensions, mm				Weight, kg
		D	L	d	l	
SB-1-25/100	1	25	100	M6-7H	15	0,379
SB-1-25/150			150			0,572
SB-1-25/175			175			0,668
SB-1-25/200			200			0,764
SB-2-25/100	2	25	100	M8-6g	15	0,391
SB-2-25/150			150			0,584
SB-2-25/175			175			0,680
SB-2-25/200			200			0,776
SB-3-25/100	3	25	100	M6-7H	12	0,379
SB-3-25/150			150			0,572
SB-3-25/200			200			0,668
SB-3-25/300			300	M6-7H	15	1,148
SB-3-25/400			400			1,533
SB-4-25/78	4	25	78	M5-7H	10	0,280
SB-4-25/100			100	M6-7H	12	0,364
SB-4-25/150			150		15	0,578
SB-4-25/200			200	M8-7H	15	0,652
SB-5-22/100	5	22	100	M8-6g	12	0,310
SB-5-22/150			150			0,459
SB-5-22/175			175			0,604
SB-5-23/200			200			0,665

1. Magnetic induction on rods' surface is 0.5 - 1.0 T, according to technical specification.
2. Operation temperature up to 80°C. Design - 01 - 120°C. Design - 02 - 150°C.
3. Manufacturing of separators accounting for customer's requirements is available.

CONTACTS:

33024, Rivne, Ukraine, Mlynivska str. 32
tel. +38 067 363 82 16, +38 050 461 49 39,
+38 050 460 08 99
e-mail: separator@prodecolog.com.ua
www.prodecolog.com.ua

