



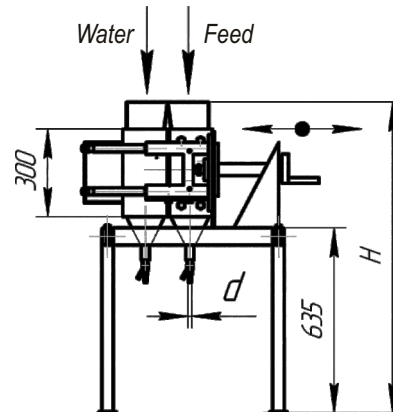

Magnetic Filters FM

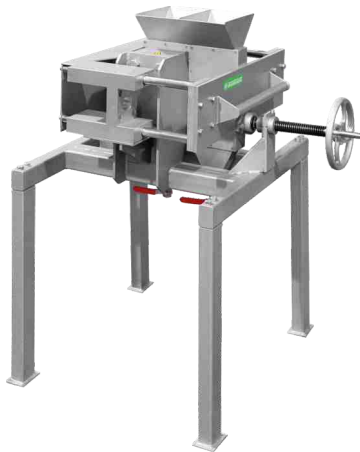

Designed for extracting ferro magnetic and para magnetic materials from liquids and suspensions.

Applied in ceramics, porcelain and faience as well as in other industries.

Name	Productivity*, m ³ /h	Dimensions of operating area, mm		d, mm	Overall dimensions, mm			Weight, kg
		Width	Length		L	B	H	
FM- 6/12,5-H	2.25	60	125	G1/2"	800	720	1070	160
FM- 6/19-H	3.4		190		900			210
FM- 6/25-H	4.5		250	G3/4"	1000			260

1. * At suspension moisture 70%.
2. Magnetic system from neodymium magnets.
3. Quantity of sections with a top plate - 2.
4. Material fineness -1 +0.01.
5. Manufacturing of filter accounting for customer's requirements is available.

