




Metal Detectors DMT3M

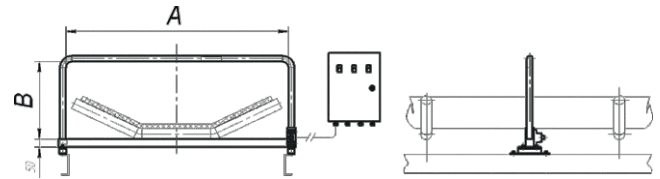

Designed for metallic extraneous impurities (ferrous and non-ferrous metals as well as manganese steel) in the flows of non-metallic products that are moved by conveyor belt with the purpose to protect technological equipment from damage. Can work on conveyor belts the joints of which are connected with the application of metallic elements.

Name	Width of conveyor belt, mm	Speed of conveyor belt, m/s	Consuming power, VA	Frame dimensions, mm		Weight, kg, not more
				A	B	
DMT3M 70x20	400	0,3 - 5,0	30	700	200	20
DMT3M 70x30					300	21
DMT3M 70x40					400	22
DMT3M 70x50					500	23
DMT3M 80x20	500			800	200	20
DMT3M 80x30					300	21
DMT3M 80x40					400	23
DMT3M 80x50					500	24
DMT3M 95x30	650			950	300	22
DMT3M 95x40					400	24
DMT3M 95x50					500	26
DMT3M 110x30	800			1100	300	24
DMT3M 110x40					400	26
DMT3M 110x50					500	28
DMT3M 130x40	1000			1300	400	26
DMT3M 130x50					500	28
DMT3M 130x60		600	30			
DMT3M 130x70		700	32			
DMT3M 150x40	1200	1500	400	27		
DMT3M 150x50			500	30		
DMT3M 150x60			600	33		
DMT3M 150x70			700	36		
DMT3M 170x40	1400	1700	400	32		
DMT3M 170x50			500	35		
DMT3M 170x60			600	38		
DMT3M 170x70			700	41		
DMT3M 190x40	1600	1900	400	33		
DMT3M 190x50			500	36		
DMT3M 190x60			600	39		
DMT3M 190x70			700	42		
DMT3M 210x40	1800	2100	400	35		
DMT3M 210x50			500	39		
DMT3M 210x60			600	43		
DMT3M 210x70			700	47		

Manufacturing of metal detectors accounting for customer's requirements is available.

